


Import Beacon checkpoints

You can import Beacon checkpoints in two ways, just by following the steps below – (through the Mobile app is the easiest way):

Through the Web app

- Click on the “Company” button on the left of your navigation bar, and choose “Checkpoints”.
- At the top navigation bar of “Checkpoints” screen, click on the “Add” button and then select the “Beacon” option.
- You have 2 options for uploading beacon ID(s):
 - Choose the “File” radio button, to upload them via a txt file.
 - Click on the “+” icon displayed, and upload a .txt file containing the beacon ID(s) (note that the various beacons IDs must be comma separated).
 - Click on the “Upload” button to complete your import!

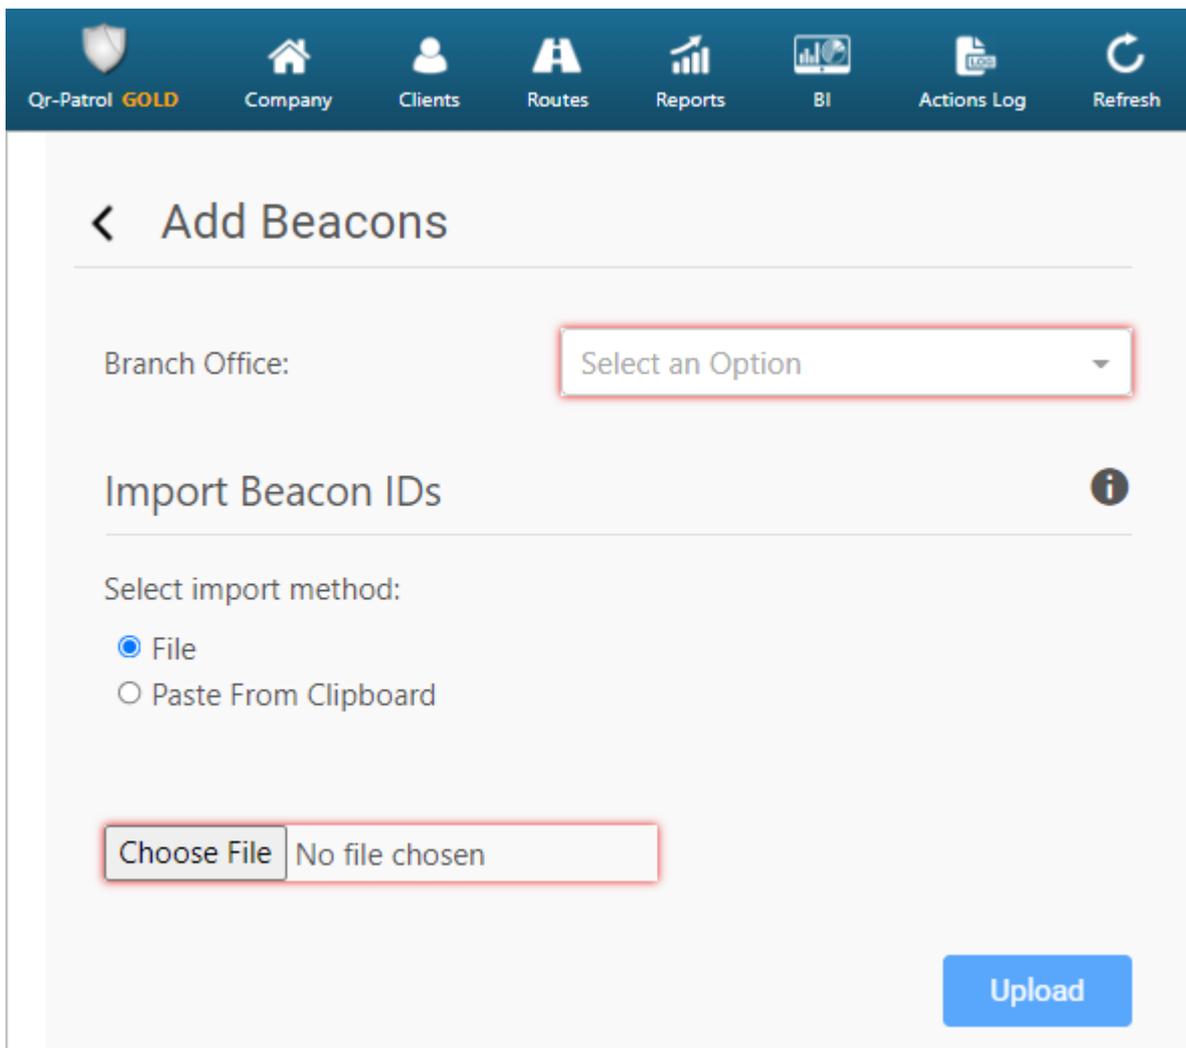

The screenshot shows the 'Add Beacons' interface in a web application. At the top is a dark blue navigation bar with icons and labels for 'Qr-Patrol GOLD', 'Company', 'Clients', 'Routes', 'Reports', 'BI', 'Actions Log', and 'Refresh'. Below this is a light gray header with a back arrow and the title 'Add Beacons'. The main content area includes a 'Branch Office:' label next to a dropdown menu showing 'Select an Option'. Below that is the section 'Import Beacon IDs' with an information icon. Underneath is the 'Select import method:' section with two radio buttons: 'File' (selected) and 'Paste From Clipboard'. At the bottom of this section is a file selection box with a 'Choose File' button and the text 'No file chosen'. A blue 'Upload' button is located at the bottom right of the form.

or:

- Choose the “Clipboard” radio button, to upload them via a text-box area.

- On the text-box area displayed, enter the beacon ID(s) (note that the various beacons IDs must be comma separated).
- Click on the “Upload” button to complete your import!

Qr-Patrol GOLD Company Clients Routes Reports BI Actions Log Refresh

< Add Beacons

Branch Office:

Import Beacon IDs ⓘ

Select import method:

File

Paste From Clipboard

Technical Info

Make sure that your beacon ID(s) have correct format:

- For an iBeacon, you should use the UUID, Major and Minor values with an underscore between them (i.e. `UUID_Major_Minor`). For example, a valid iBeacon ID could be: `e2c56db5-dffb-48d2-b060-d0f5a71096e0_6_6`.

- For an Eddystone beacon, you should use the NamespaceID and InstanceID values with an underscore between them (i.e. `NamespaceID_InstanceID`). For example, a valid Eddystone ID could be: `d3ex1918sde157cl1102_1cl1567drs27`.

To retrieve/program these values you can use the Application provided by your Beacon supplier. Please note that the combination of those values (`UUID_Major_Minor` in case of iBeacons and `NamespaceID_InstanceID` in case of Eddystone beacons) has to be unique.

Through the Mobile app

If you are using **Eddystone** beacon checkpoints, you also have the option to import them from your mobile application as follows:

- Firstly, make sure that on your mobile application under Settings, the "Eddystone" Beacon Type is selected.
- On your mobile application, click on 'Checkpoint Assignment'.
- Click on 'Scan Beacon Tag' and then press 'Scan Beacons'. A list of all the Beacons in range (sorted by proximity) will appear on the top of your screen.
- Note that the Beacons that already belong to your Company (have been added to your Checkpoints list) are displaying in green colour.
- Click on 'Stop Scanning Beacons' and select (at least) one Beacon.
- Insert a Description and/or a Site Code (optionally).
- Click on 'Assign'

The Beacon will be added to your Checkpoint list and you will be then able to view it on your web-application by going to Company -> Checkpoints.